

EB12-5 F2

12V 5Ah / 10hr rate



Introduction

Samson EB series is designed for European standard with 5-year design life in float service. The series battery is featured of high consistency, excellent performance and reliable standby service life. It is widely applied in UPS/EPS, medical equipment, emergency light and security system.


Battery Features

- Low self-discharge
- Fully tank formed plates
- Low impurity electrolyte
- Spill proof / leak proof
- Multi-position usage
- ABS case and cover VO upon request
- Very high purity lead

Electrical Specification

Design floating Life @ 20°C (68°F)	5 years
Design Life Cycles @ 80% D.O.D. (25°C)	250 Cycles
Nominal Capacity @ 20°C /68°F	
20 hour rate 0.27A to 1.75Vpc	5.4 Ah
10 hour rate 0.5A to 1.80Vpc	5 Ah
Internal Resistance	
(Fully charged battery @ 20°C /68°F)	25 mΩ
Max. Discharge Current @ 20°C /68°F	75 A (5S)
Short Circuit Current	80 A
Charge Methods: Constant voltage charge @ 20°C /68°F	
Cycle Use	14.7 ~ 14.9V
Max. Current	1.21 A
Standby Use	13.6 - 13.8V
Operating Temperature Range	-30 ~ 50°C
<i>Notes: battery voltage must be adjusted according to temperature. Please refer to our recommendation.</i>	
Self-Discharge	
3% of capacity declined per month @ 20°C (68°F).	

Battery Picture & Terminal Layout

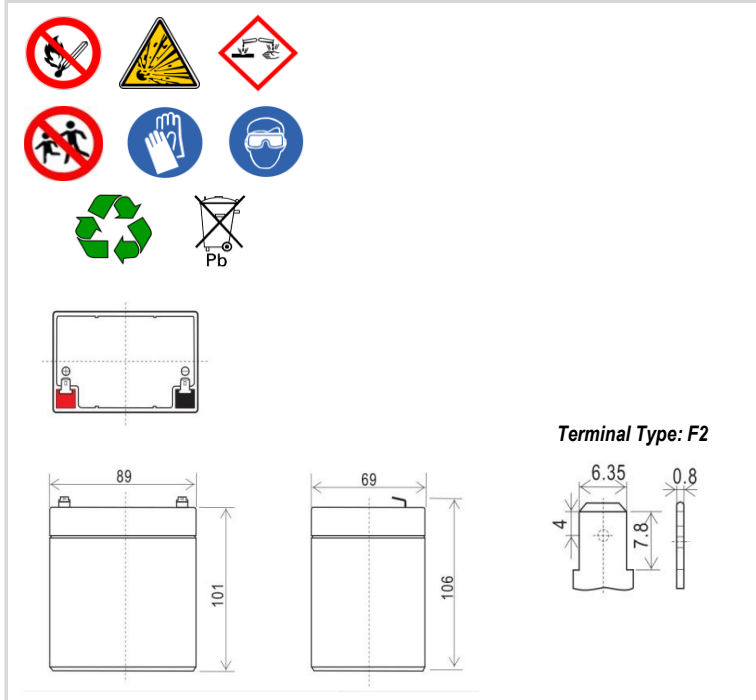

Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height	Height		
89 mm	69 mm	101 mm	106 mm	1,59 kg	
3,5 inch	2,7 inch	4,0 inch	4,2 inch	3,5 lbs	

Certificates



Other relevant information

Contry of origin:	China	HS Code (harmonized system code):	85 07 10 00
UN-Transport declaration:	UN2800	Customs tariff number	8507 10 20 80

Typical Applications

- UPS & EPS Security Power Supply Power Utility Electrical Toys

Constant Current Discharge (Amperes @ 20°C /68°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1,60	12,35	9,43	8,06	6,68	5,64	4,91	4,51	4,12	3,77	3,48	3,25	1,70	1,34	1,13	0,98	0,53	0,28
1,65	11,83	9,03	7,73	6,42	5,44	4,74	4,36	3,98	3,66	3,39	3,18	1,66	1,30	1,10	0,96	0,53	0,28
1,70	11,31	8,63	7,39	6,15	5,23	4,55	4,20	3,85	3,55	3,30	3,11	1,62	1,28	1,08	0,94	0,52	0,27
1,75	10,79	8,23	7,06	5,89	5,04	4,38	4,05	3,72	3,44	3,21	3,04	1,58	1,24	1,06	0,93	0,51	0,27
1,80	10,27	7,84	6,74	5,64	4,86	4,22	3,91	3,59	3,33	3,13	2,97	1,54	1,20	1,03	0,91	0,50	0,26

Constant Power Discharge (Watts/cell @ 20°C /68°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1,60	23,66	18,06	15,36	12,66	10,65	9,30	8,63	7,97	7,52	6,97	6,52	3,47	2,60	2,27	1,78	1,08	0,59
1,65	22,70	17,33	14,74	12,15	10,25	8,92	8,28	7,63	7,21	6,67	6,25	3,32	2,53	2,22	1,75	1,07	0,57
1,70	21,75	16,60	14,14	11,69	9,92	8,60	7,96	7,33	6,92	6,39	5,98	3,16	2,46	2,17	1,72	1,06	0,56
1,75	20,96	16,00	13,61	11,22	9,52	8,22	7,61	7,00	6,60	6,10	5,70	3,00	2,39	2,11	1,69	1,05	0,56
1,80	20,01	15,27	13,02	10,76	9,18	7,91	7,32	6,73	6,36	5,88	5,51	2,89	2,30	2,05	1,64	1,04	0,53

Subject to revision without notice. Please contact our sales representatives for latest version.

Web: www.jysk-akku.dk

E-mail: jvba@jysk-akku.dk

Version No.:


29-01-2019

EB12-5 F2

12V 5Ah / 10hr rate



Graphs

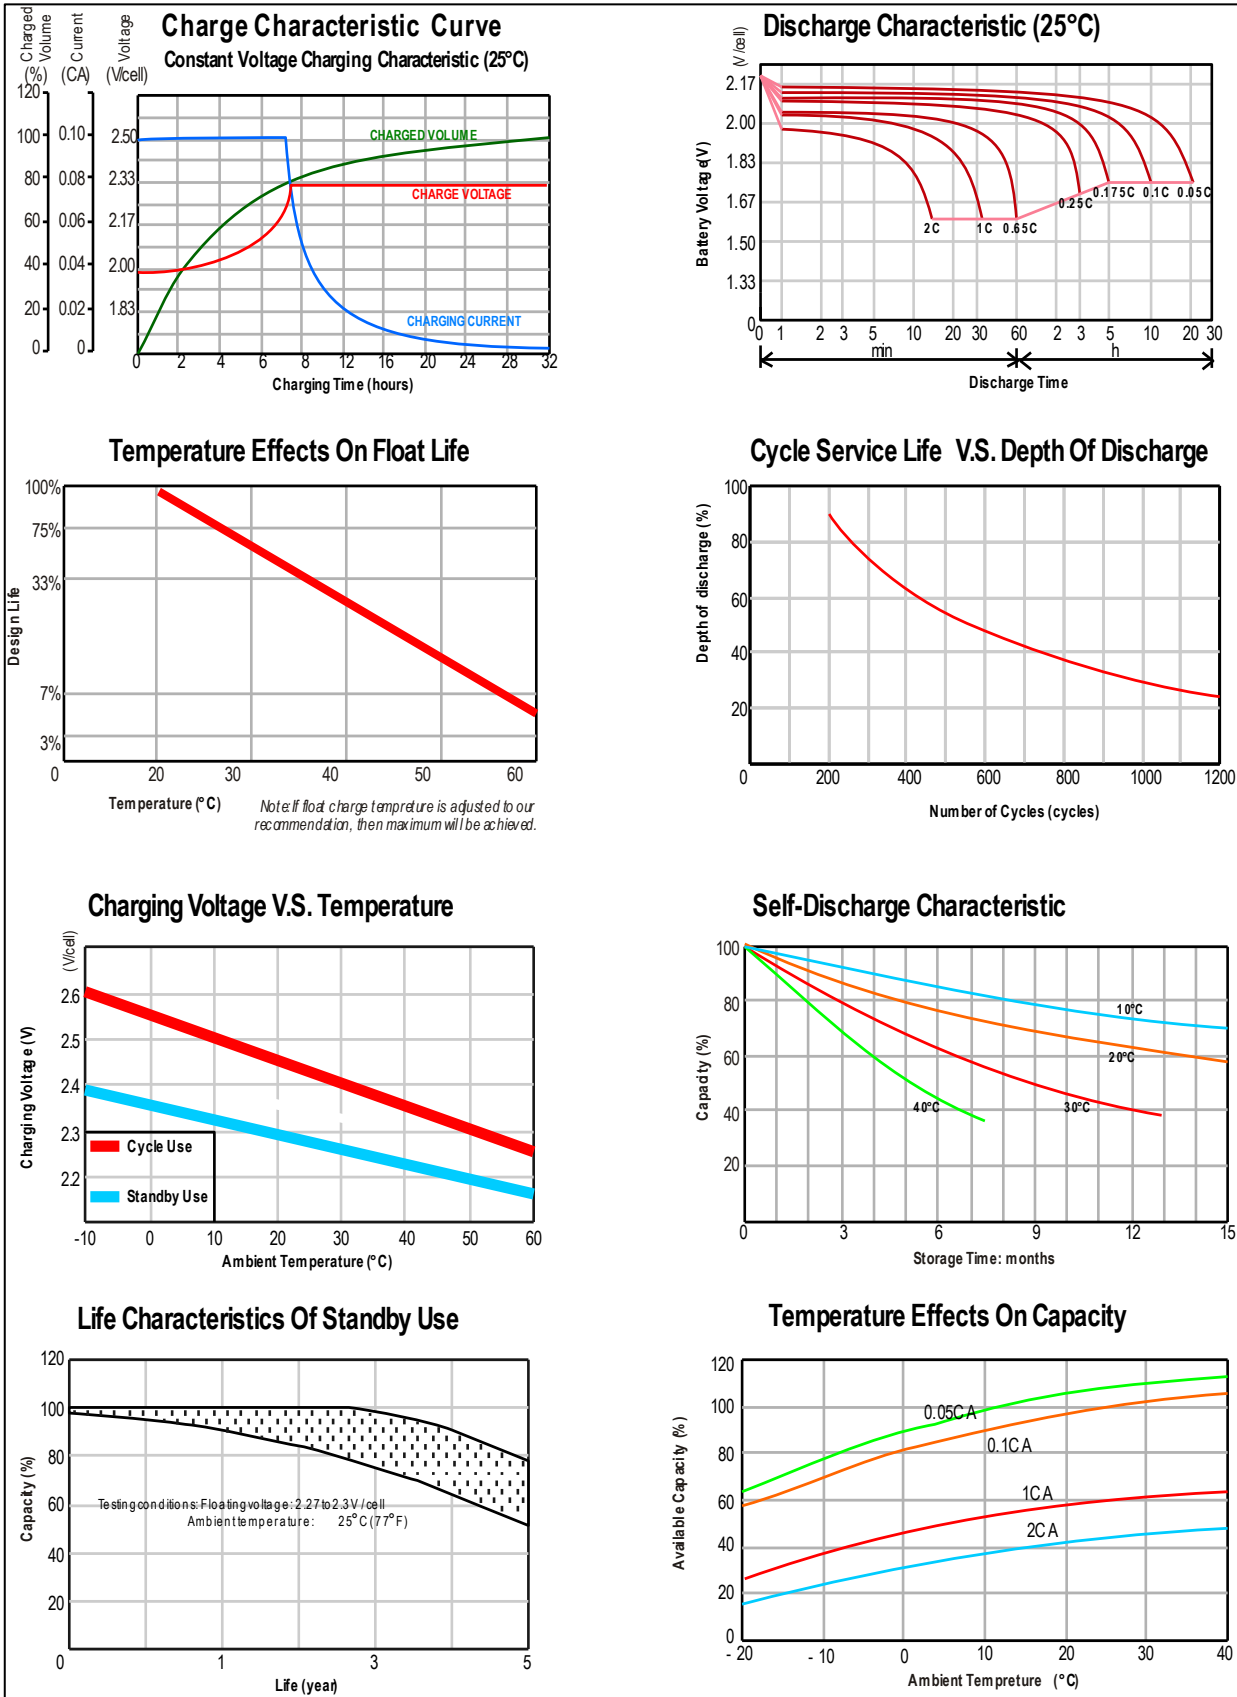

Subject to revision without notice. Please contact our sales representatives for latest version.